



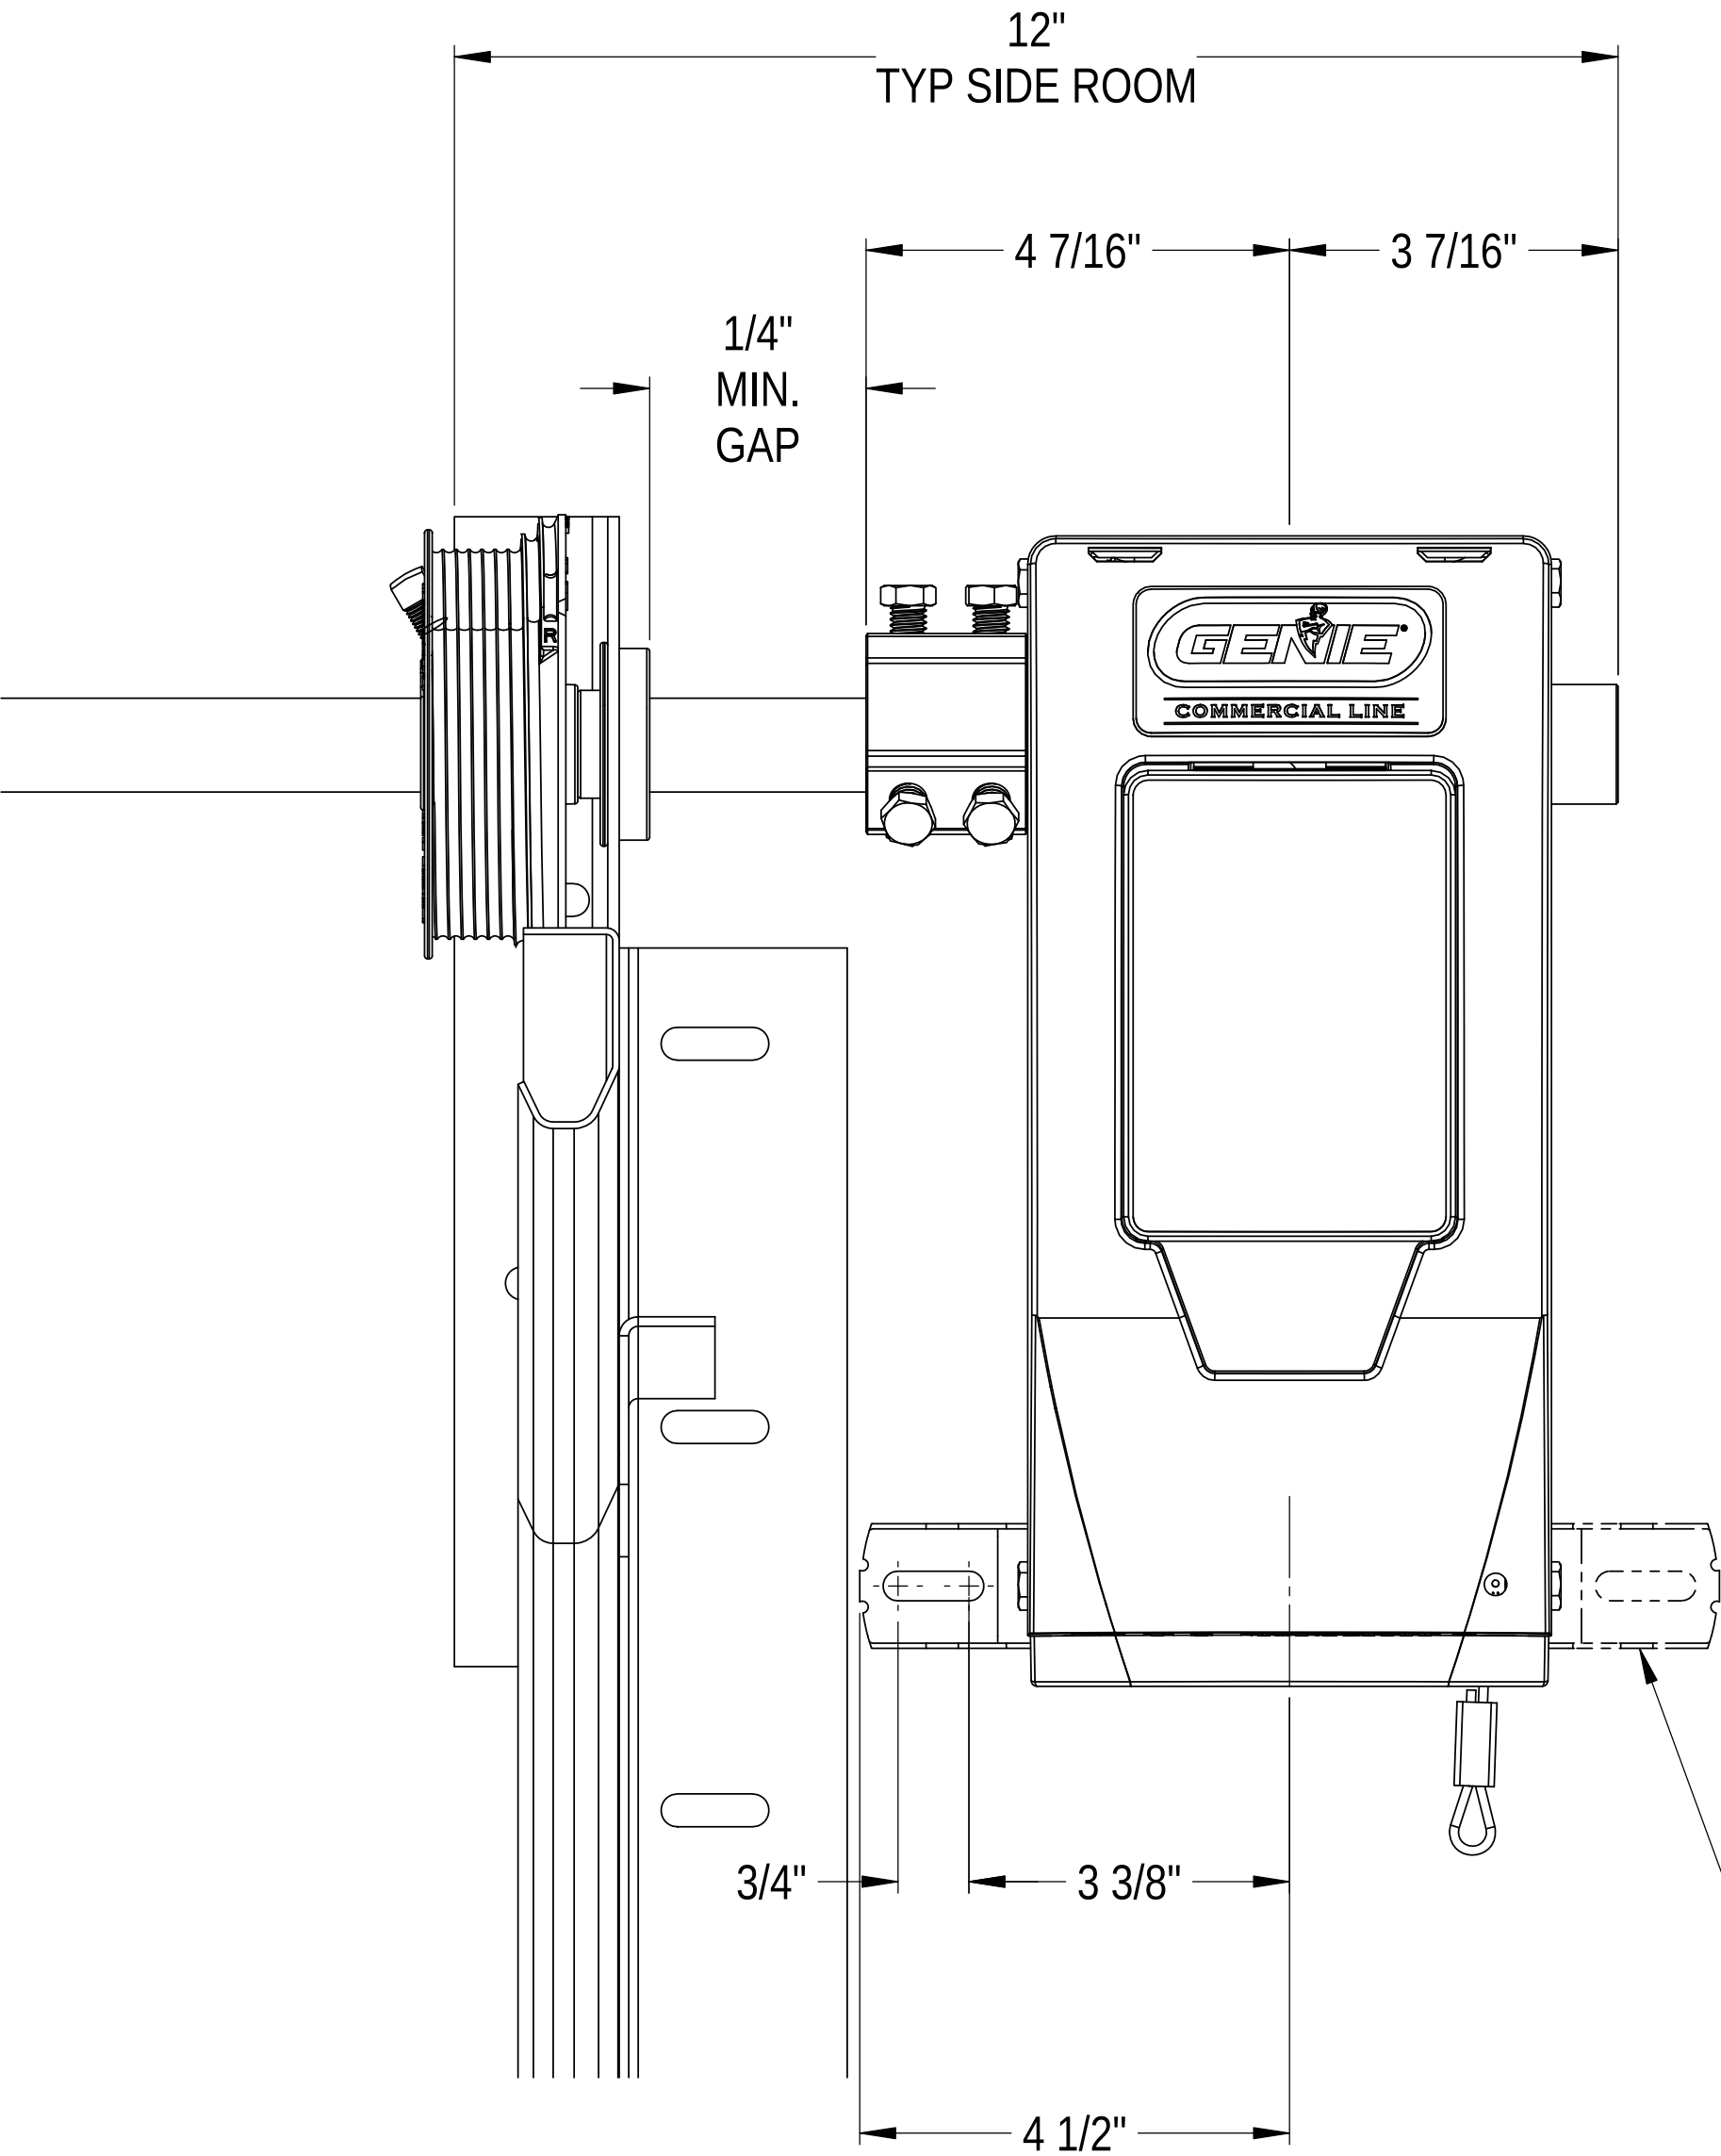

BRACKET CAN BE MOUNTED TO OPERATOR ON EITHER SIDE DEPENDING ON MOUNTING REQUIREMENTS

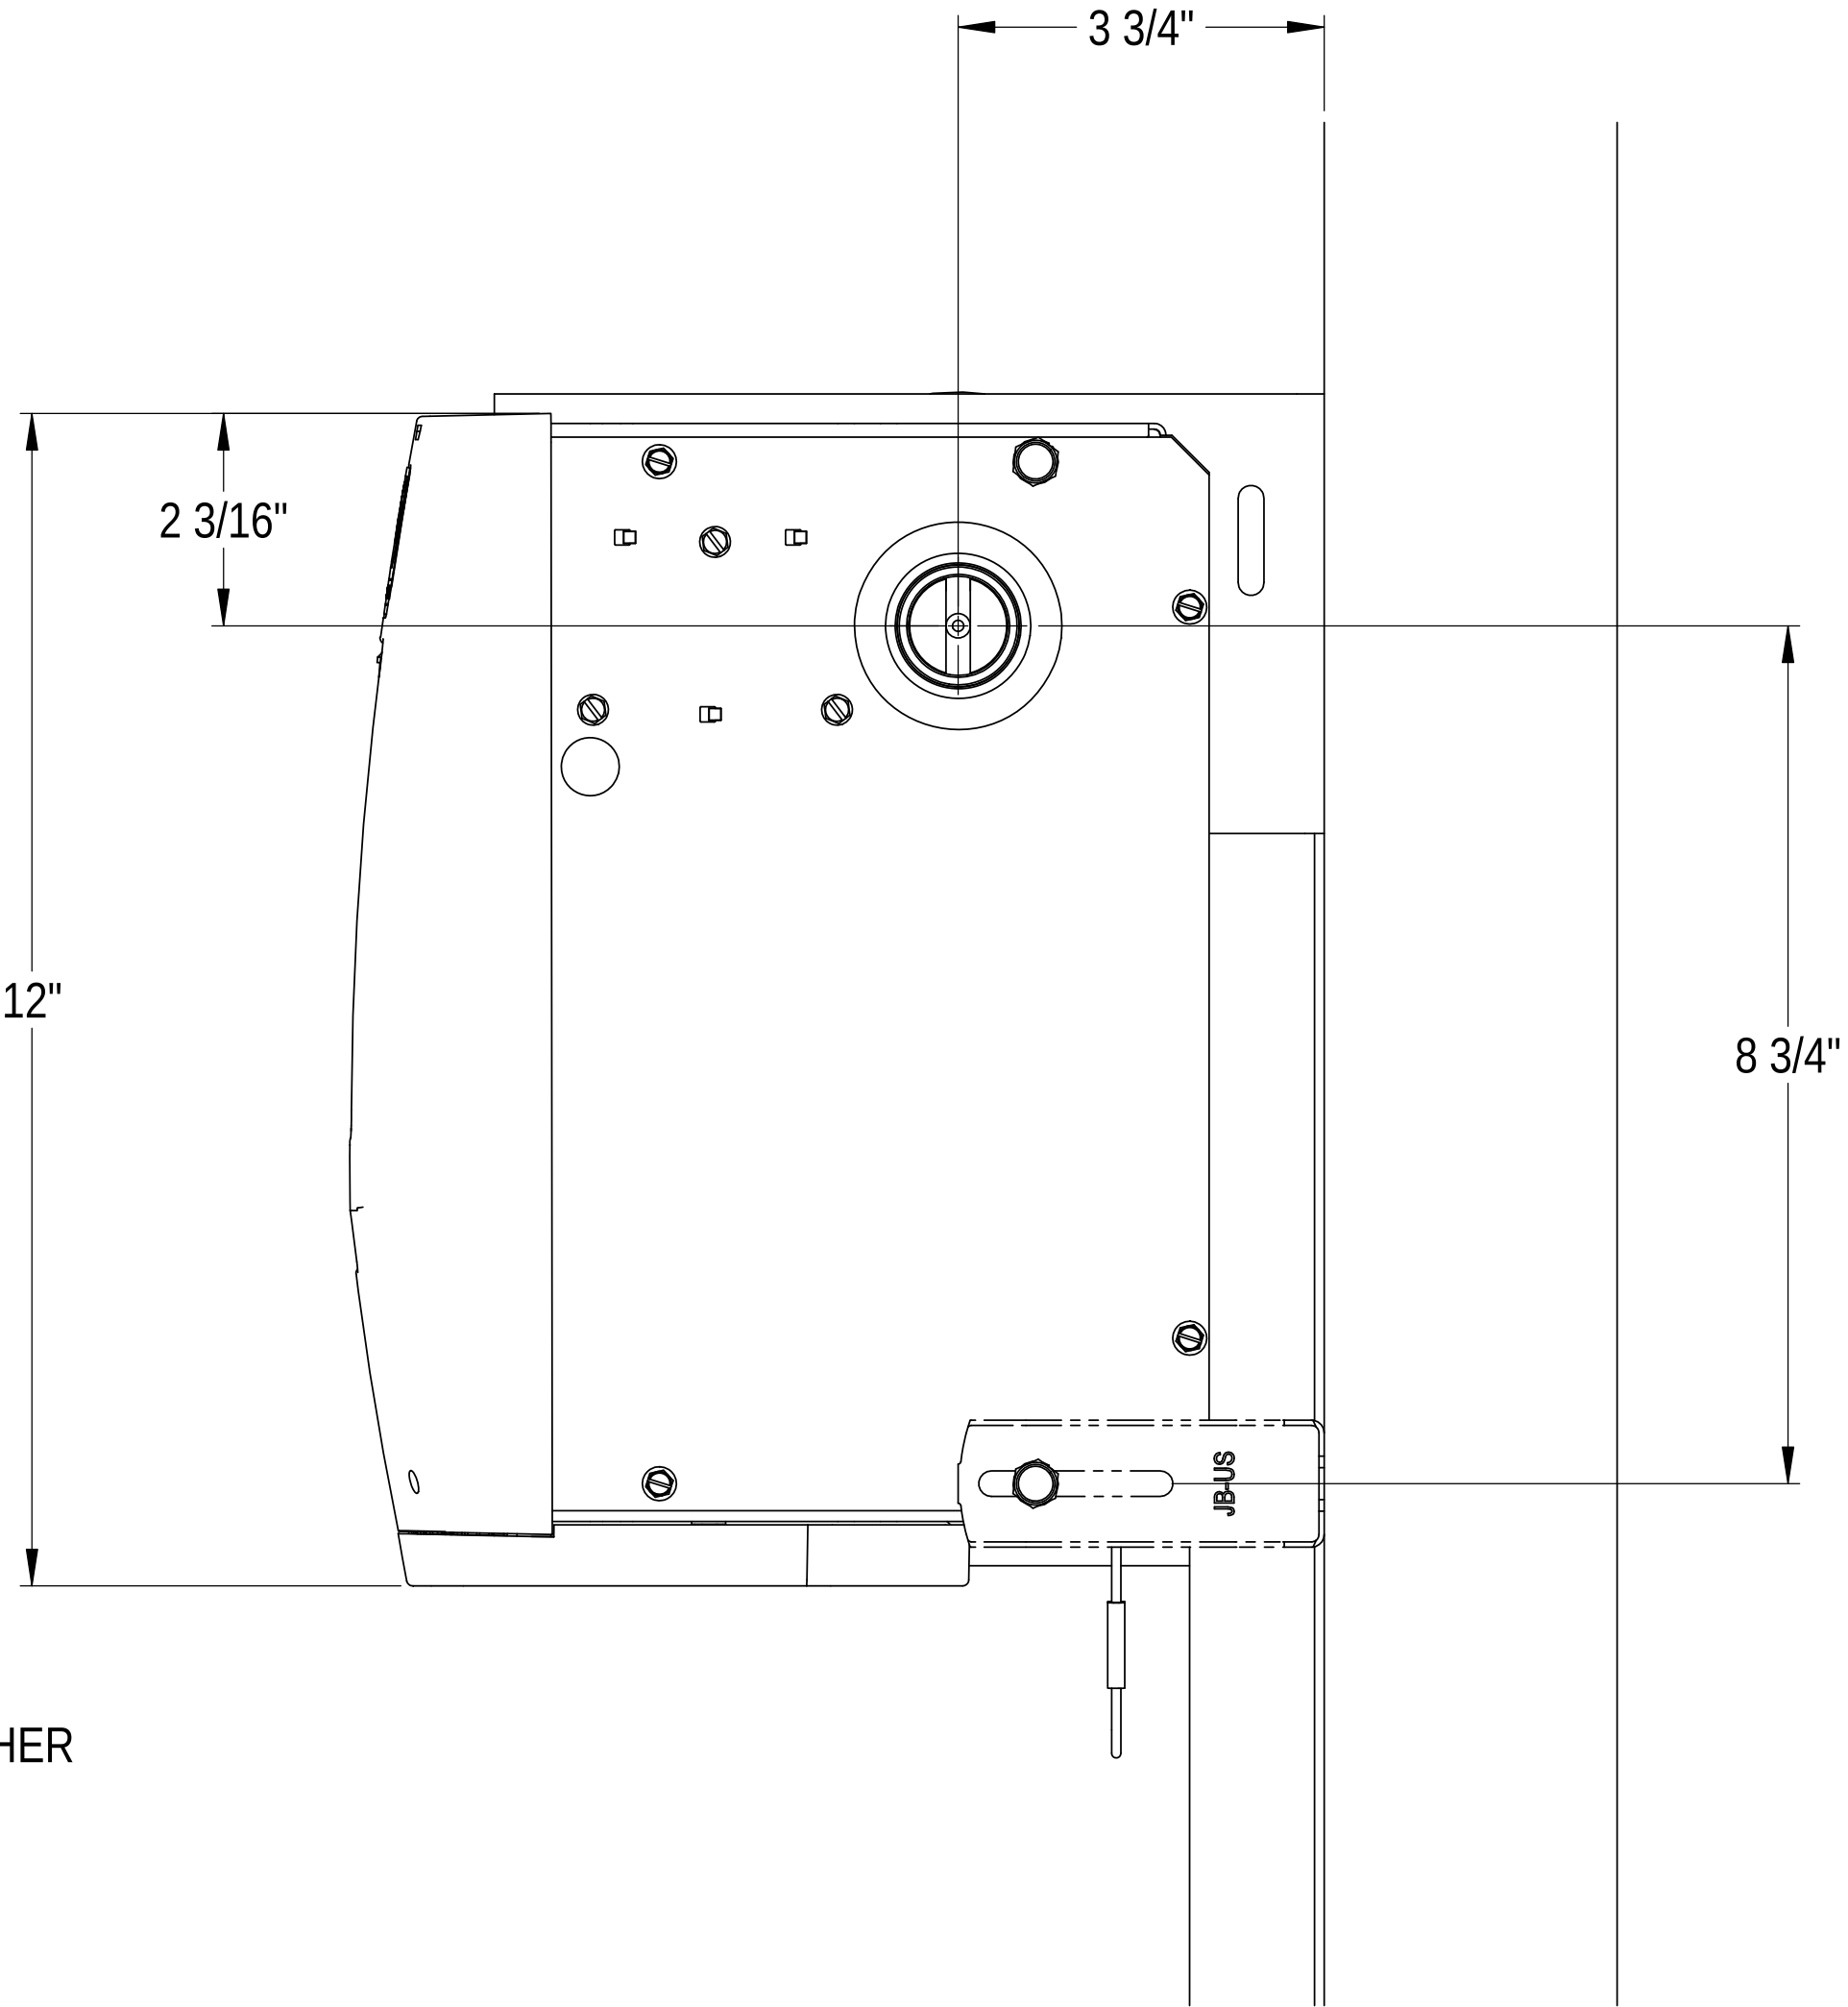

NOTES:

1. PLEASE VERIFY VOLTAGE, PHASE & MOUNTING.
2. ALL OPTIONS ARE AT ADDED COST.
3. A CLEARANCE OF 6" SHOULD BE ALLOWED FOR ACCESS TO ELECTRIC BOX.
4. CONTROL VOLTAGE IS A NEC CLASS 2 CIRCUIT.
5. AVERAGE DOOR TRAVEL SPEED IS 6.8" PER SECOND.

ELECTRIC OPERATOR: GLDJ (LIGHT DUTY)	
DOOR TYPE:	SECTIONAL
MOUNTING TYPE:	SIDEMOUNT DIRECT COUPLE
PROJECT:	
ARCHITECT:	
CONTRACTOR:	
DISTRIBUTOR:	
PLANT:	
DRAWN BY:	DATE:
APPROVED BY:	DATE:
DWG NO.	SHT ____ OF ____
ENG. CERT. NO.	
113233	

ARCHITECT DOOR NUMBER	QTY	FACTORY ORDER NUMBER	MOUNT TYPE	VOLTS	PHASE	CONTROL STATION		
			SIDEMOUNT DIRECT COUPLE			3 BTN	KEY SWITCH	EXT. FLUSH 3 BUTTON